

200C/600V

FEP/FEP
HIGH-TEMPERATURE CABLE

RATINGS / APPROVALS

200°C – 600 Volts

Passes the IEEE-383 Vertical Cable Tray Flame Test

Passes UL VW-1 Flame Test

CONSTRUCTION

Conductors

22 AWG – 2 AWG

Annealed tinned copper

Insulating System

Colored extruded fluorinated ethylene propylene (FEP) fluoropolymer insulation.

K-2 color code. (Unless specified)

Overall Binder Tapes

Nomex®

Outer Covering

Extruded fluorinated ethylene propylene (FEP) fluoropolymer outer jacket.

Standard Color

Black (Colors available)

CHARACTERISTICS


- FEP leads have outstanding chemical, fluid, age and ozone resistance.
- Fillers, where needed, are made with flame impervious fibers with moisture repellent finish.
- Cable utilizes Radix “Torque Free” design. This eliminates memory found in traditional right hand or left hand twisted cables.
- Small diameter.

APPLICATION

Multiple conductor cables insulated and jacket with FEP Teflon® are widely used where small O.D. is required in industrial high temperature applications where resistance to abrasion and mechanical abuse coupled with moisture or fluid resistance are desired. This wire is widely used in steel and glass plants, as well as high temperature locations near boilers, steam lines and in chemical processing plants. Use above or below grade in raceway, tray, or conduit.

Nomex® is a registered trademark of DuPont.

ISO 9001:2000
CERTIFIED

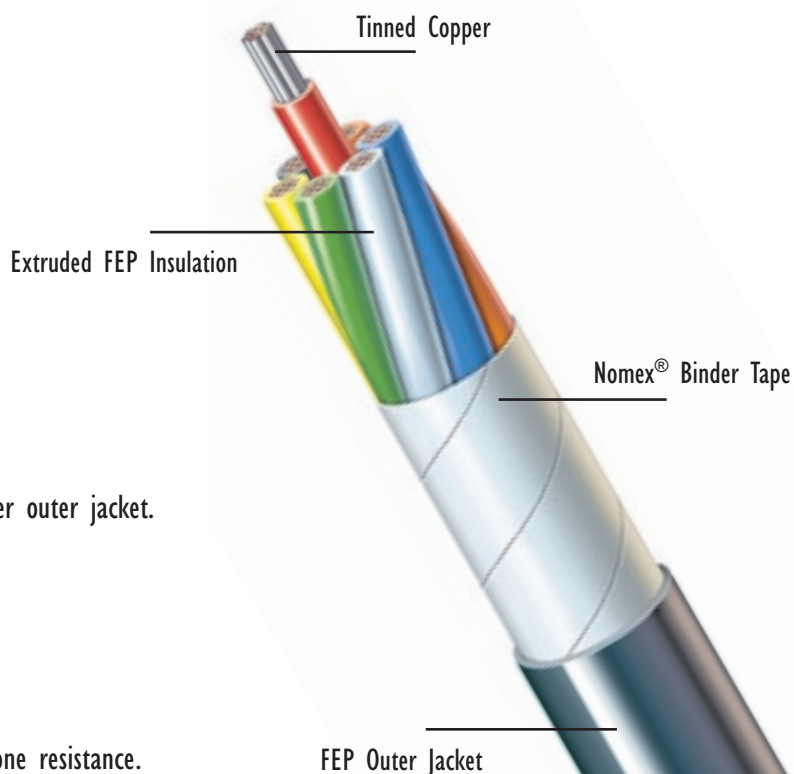

Radix™

Radix Wire Company

26000 Lakeland Boulevard • Cleveland, OH 44132

Tel: 216 731-9191 • Fax: 216 731-7082

www.radix-wire.com

FEP/FEP 200C/600V

Part No.	Awg. Size	# Strands	# Leads	Outer Dia. inches	Outer Dia. mm	Wgt - lbs per 1000 ft.	Wgt - kg per km
FQ18AT02A	18	7	2	0.186	4.72	26.04	38.75
FQ18AT03A	18	7	3	0.198	5.03	34.94	52.00
FQ18AT04A	18	7	4	0.217	5.51	41.80	62.21
FQ18AT05A	18	7	5	0.240	6.10	51.16	76.14
FQ18AT06A	18	7	6	0.264	6.71	60.52	90.07
FQ16AT02A	16	7	2	0.211	5.36	34.55	51.42
FQ16AT03A	16	7	3	0.225	5.72	47.29	70.38
FQ16AT04A	16	7	4	0.247	6.27	58.05	86.39
FQ16AT05A	16	7	5	0.274	6.96	73.67	109.64
FQ16AT06A	16	7	6	0.307	7.80	89.61	133.36
FQ14AT02A	14	7	2	0.242	6.15	48.58	72.30
FQ14AT03A	14	7	3	0.257	6.53	66.08	98.34
FQ14AT04A	14	7	4	0.289	7.34	85.33	126.99
FQ14AT05A	14	7	5	0.321	8.15	107.24	159.60
FQ14AT06A	14	7	6	0.352	8.94	126.80	188.71
FQ12CT02A	12	19	2	0.282	7.16	70.15	104.40
FQ12CT03A	12	19	3	0.301	7.65	96.78	144.03
FQ12CT04A	12	19	4	0.331	8.41	122.83	182.80
FQ12CT05A	12	19	5	0.368	9.35	153.86	228.98
FQ12CT06A	12	19	6	0.404	10.26	182.55	271.68
FQ10CT02A	10	19	2	0.337	8.56	103.74	154.39
FQ10CT03A	10	19	3	0.360	9.14	145.45	216.46
FQ10CT04A	10	19	4	0.397	10.08	185.54	276.13
FQ10CT05A	10	19	5	0.442	11.23	231.84	345.03
FQ10CT06A	10	19	6	0.497	12.62	283.01	421.19

Standard conductor: Tinned Copper

Consult factory for alternate conductor and stranding options.

© Registered trademark of Radix.
All dimensions listed above are nominal.

Information included in this catalog is intended as a guideline only. For applications that require tight tolerances, please contact the Radix factory for dimensional verification. Information herein is believed to be accurate as of publication date; however, if an error exists it is unintentional and Radix Wire Company, Inc. is not responsible for any claim traceable to such error.



Radix Wire Company
26000 Lakeland Boulevard • Cleveland, OH 44132
Tel: 216 731-9191 • Fax: 216 731-7082
www.radix-wire.com