

200C/600V

SAB-S
HIGH-TEMPERATURE CABLE

RATINGS / APPROVALS

200°C – 600 Volts

Passes NEMA WC 3 Flame Propagation Test

Passes IEEE-383 Vertical Cable Tray Flame Test

CONSTRUCTION

Conductors

22 AWG – 2 AWG

Annealed tinned copper

Insulating System

Composite extruded silicone rubber with intermediate fiberglass reinforcement (Sil-A-Blend®)

K-2 color code. (Unless specified)

Overall Binder Tapes

Polyester

Outer Covering

Extruded silicone rubber.

(Optional) wire braid armor of stainless steel or other suitable material.

Standard Color

Black (Colors available)


CHARACTERISTICS

- Silicone formulations suitable for UV, ozone, moisture exposure.
- Fillers, where needed, are made with flame impervious fibers with moisture repellent finish.
- Cable utilizes Radix “Torque Free” design. This eliminates memory found in traditional right hand or left hand twisted cables.
- Binder tape is non-hydroscopic, non-wicking polyester.
- Suitable for applications to -40°C.
- Not recommended for outdoor use.

APPLICATION

SAB-S is constructed for use in high temperature applications as a more flexible, multiple conductor control cable where flexibility and resistance to heat and flame are desired. This wire is used in robotic applications, as well as high temperature locations such as steel and glass plants and in power generating stations.

ISO 9001:2000
CERTIFIED

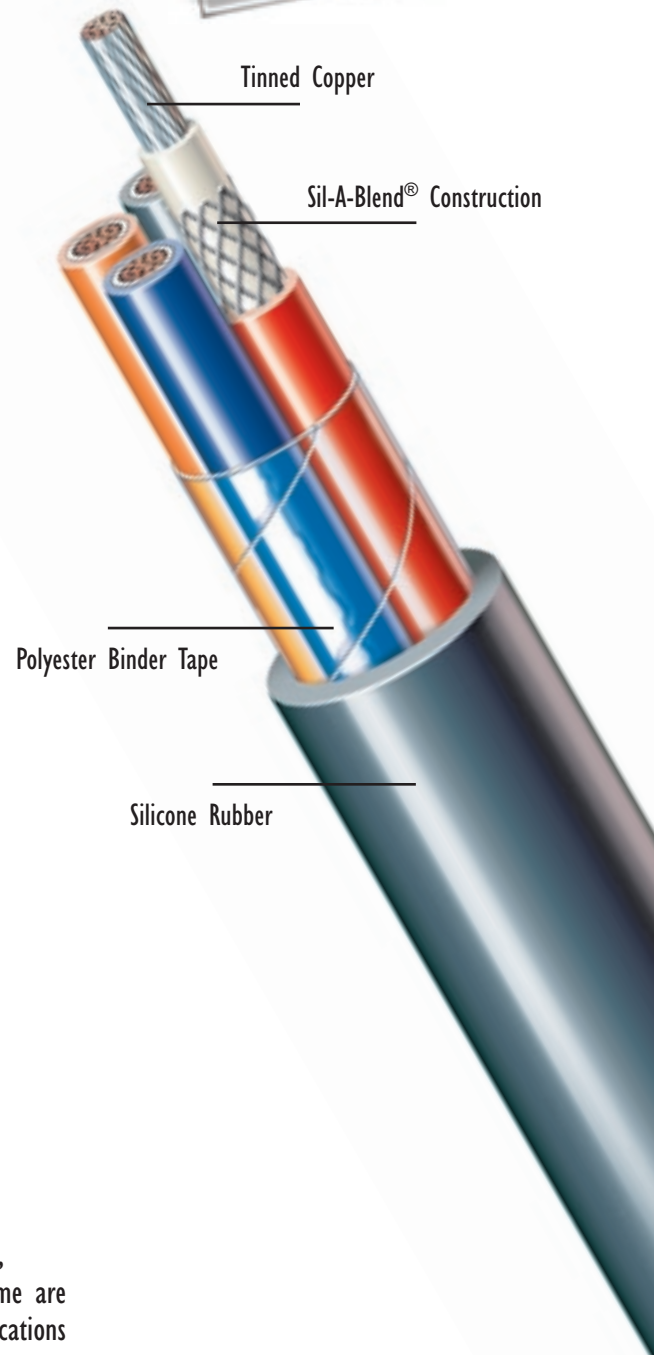

Radix™

Radix Wire Company

26000 Lakeland Boulevard • Cleveland, OH 44132

Tel: 216 731-9191 • Fax: 216 731-7082

www.radix-wire.com

SAB-S 200C/600V

Part No.	Awg. Size	# Strands	# Leads	Outer Dia. inches	Outer Dia. mm	Wgt - lbs per 1000 ft.	Wgt - kg per km
NT18AT02A	18	7	2	0.334	8.48	50.18	74.68
NT18AT03A	18	7	3	0.352	8.94	61.64	91.73
NT18AT04A	18	7	4	0.382	9.70	72.94	108.55
NT18AT05A	18	7	5	0.417	10.59	89.44	133.11
NT18AT06A	18	7	6	0.453	11.51	103.59	154.17
NT16AT02A	16	7	2	0.357	9.07	59.91	89.16
NT16AT03A	16	7	3	0.377	9.58	75.40	112.21
NT16AT04A	16	7	4	0.409	10.39	90.84	135.19
NT16AT05A	16	7	5	0.448	11.38	111.51	165.95
NT16AT06A	16	7	6	0.487	12.37	129.85	193.25
NT14AT02A	14	7	2	0.384	9.75	75.18	111.89
NT14AT03A	14	7	3	0.406	10.31	95.56	142.22
NT14AT04A	14	7	4	0.442	11.23	117.18	174.39
NT14AT05A	14	7	5	0.485	12.32	144.09	214.44
NT14AT06A	14	7	6	0.560	14.22	184.07	273.94
NT12CT02A	12	19	2	0.419	10.64	96.51	143.63
NT12CT03A	12	19	3	0.443	11.25	127.47	189.71
NT12CT04A	12	19	4	0.483	12.27	157.46	234.34
NT12CT05A	12	19	5	0.564	14.33	209.51	311.80
NT12CT06A	12	19	6	0.612	15.54	245.08	364.74
NT10CT02A	10	19	2	0.559	14.20	162.61	242.00
NT10CT03A	10	19	3	0.591	15.01	215.32	320.45
NT10CT04A	10	19	4	0.645	16.38	266.96	397.30
NT10CT05A	10	19	5	0.710	18.03	328.03	488.19
NT10CT06A	10	19	6	0.774	19.66	385.58	573.83

Standard conductor: Tinned Copper

Consult factory for alternate conductor and stranding options.

© Registered trademark of Radix.
All dimensions listed above are nominal.

Information included in this catalog is intended as a guideline only. For applications that require tight tolerances, please contact the Radix factory for dimensional verification. Information herein is believed to be accurate as of publication date; however, if an error exists it is unintentional and Radix Wire Company, Inc. is not responsible for any claim traceable to such error.



Radix Wire Company
26000 Lakeland Boulevard • Cleveland, OH 44132
Tel: 216 731-9191 • Fax: 216 731-7082
www.radix-wire.com